

PRAYAS

JEE 2025

ATDB.uno

Lecture - 04

Physics

Laws Of Motion

By- Saleem Ahmed Sir





Topics *to be covered*

1

Equilibrium

2

F = ma based ques.

ATDB.uno

3


4



All masses are in equilibrium find the value of unknown mass



①

$2T = mg$

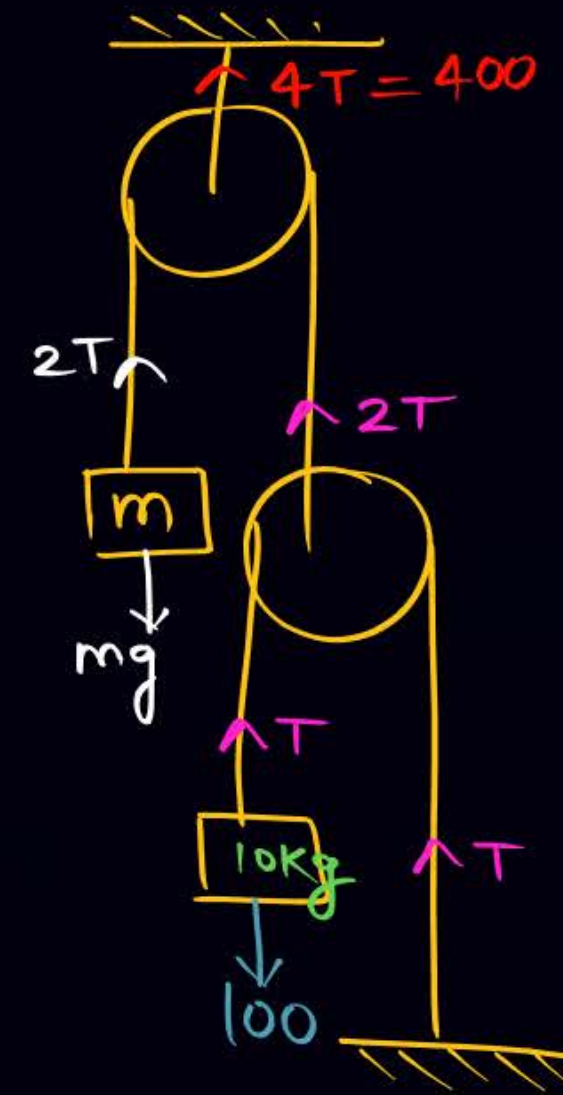

$T = 100$
 $2T = mg$
 $2 \times 100 = m \times 10$
 $m = 20\text{kg}$

ATDB.uno

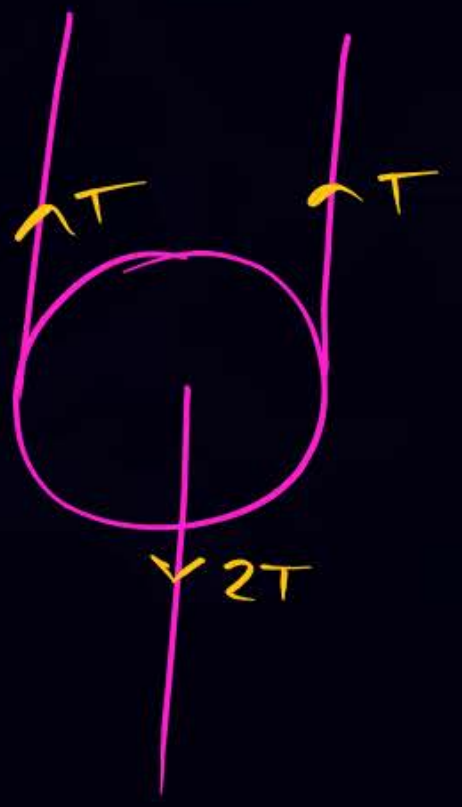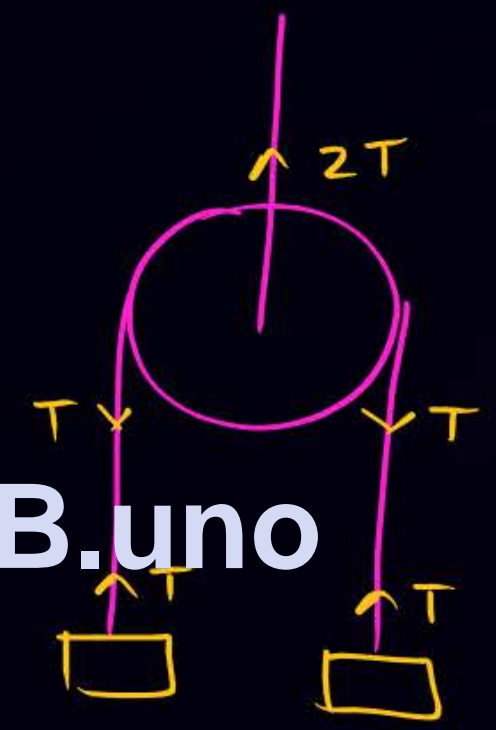



2

All masses are in equilibrium

$2T = m_2 g$




$T = m_1 g$

$m_1 = 10$
 $m_2 = 20$

Q

ATDB.uno

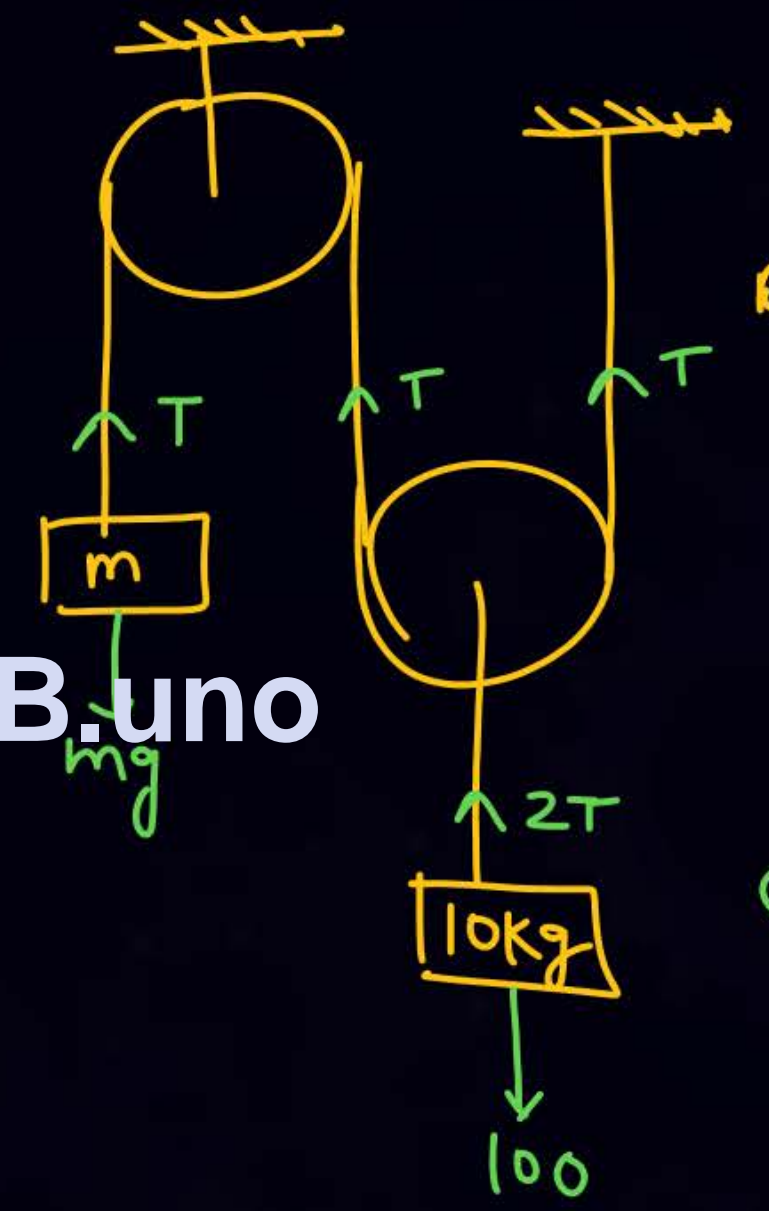


Both masses are in equil.

$2T = 100$, $T = 50$
 $T = mg$
 $m = 5 \text{ Kg}$



Q
 All masses are in equil.
 find m_1, m_2, m_3

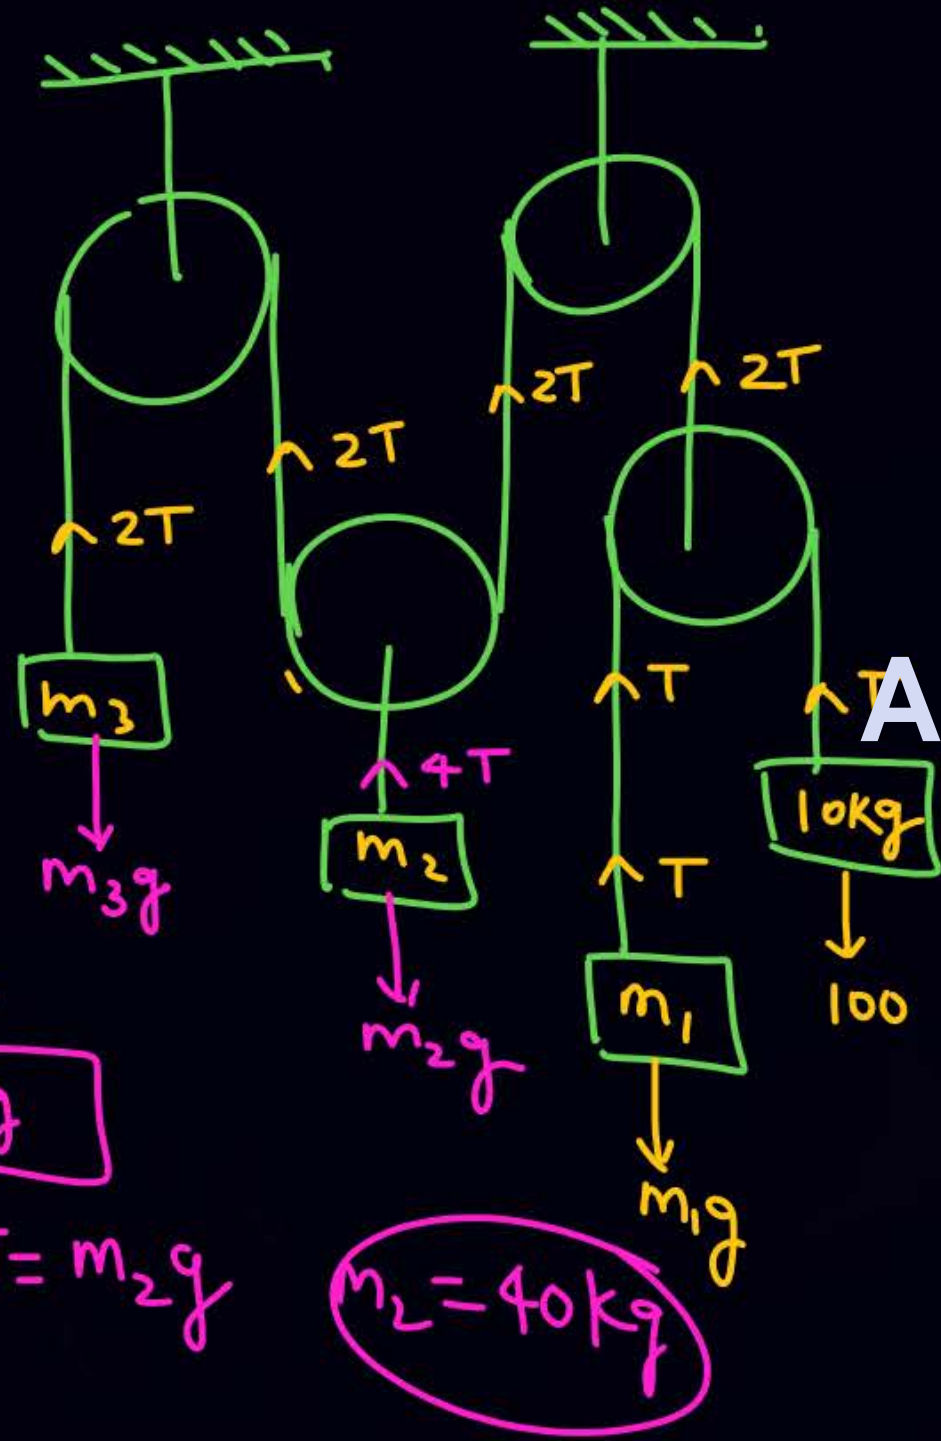


$2T = m_3 g$
 $m_3 = 20 \text{ kg}$
 $4T = m_2 g$

$m_2 = 40 \text{ kg}$

$T = 100$
 $m_1 = 10 \text{ kg}$

Q

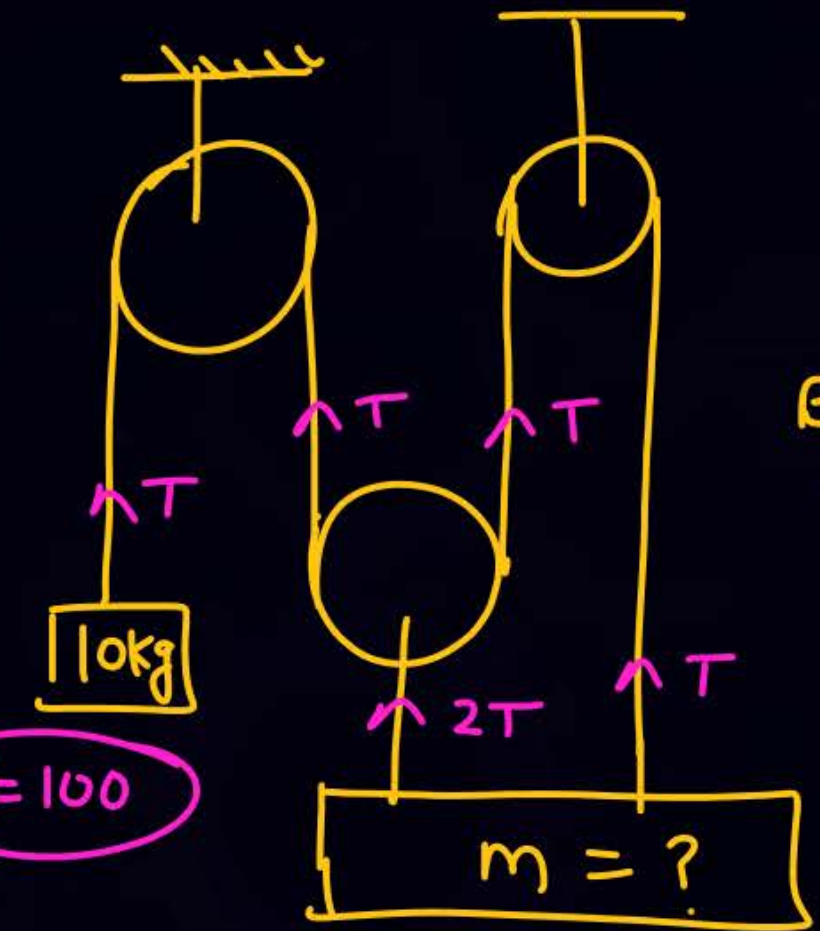


$T = 100$

$3T = mg$
 $300 = mg$
 $m = 30 \text{ kg}$

Both masses are in equil.

ATDB.uno

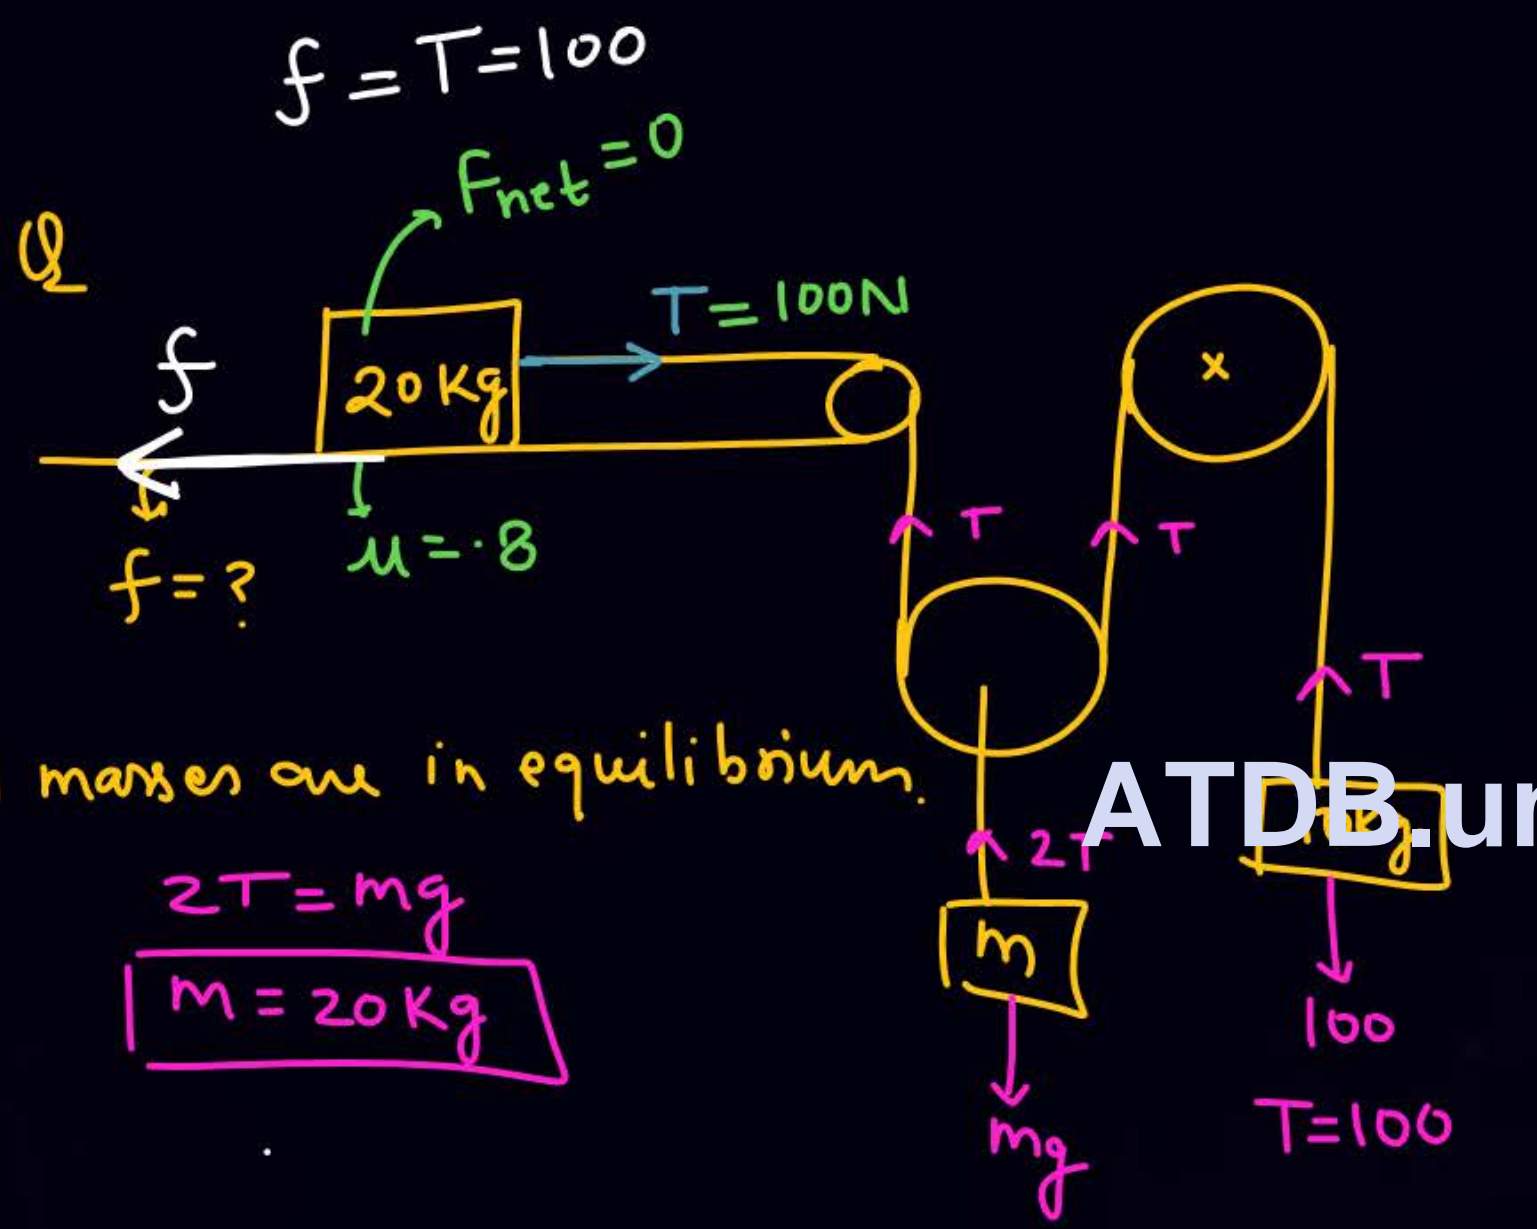

All masses are in equilibrium.

$$2T = mg$$


$$M = 20\text{ Kg}$$

ATDB.uno



Q
All masses are in equil.

$m_2 = 20$
 $m_3 = 40$

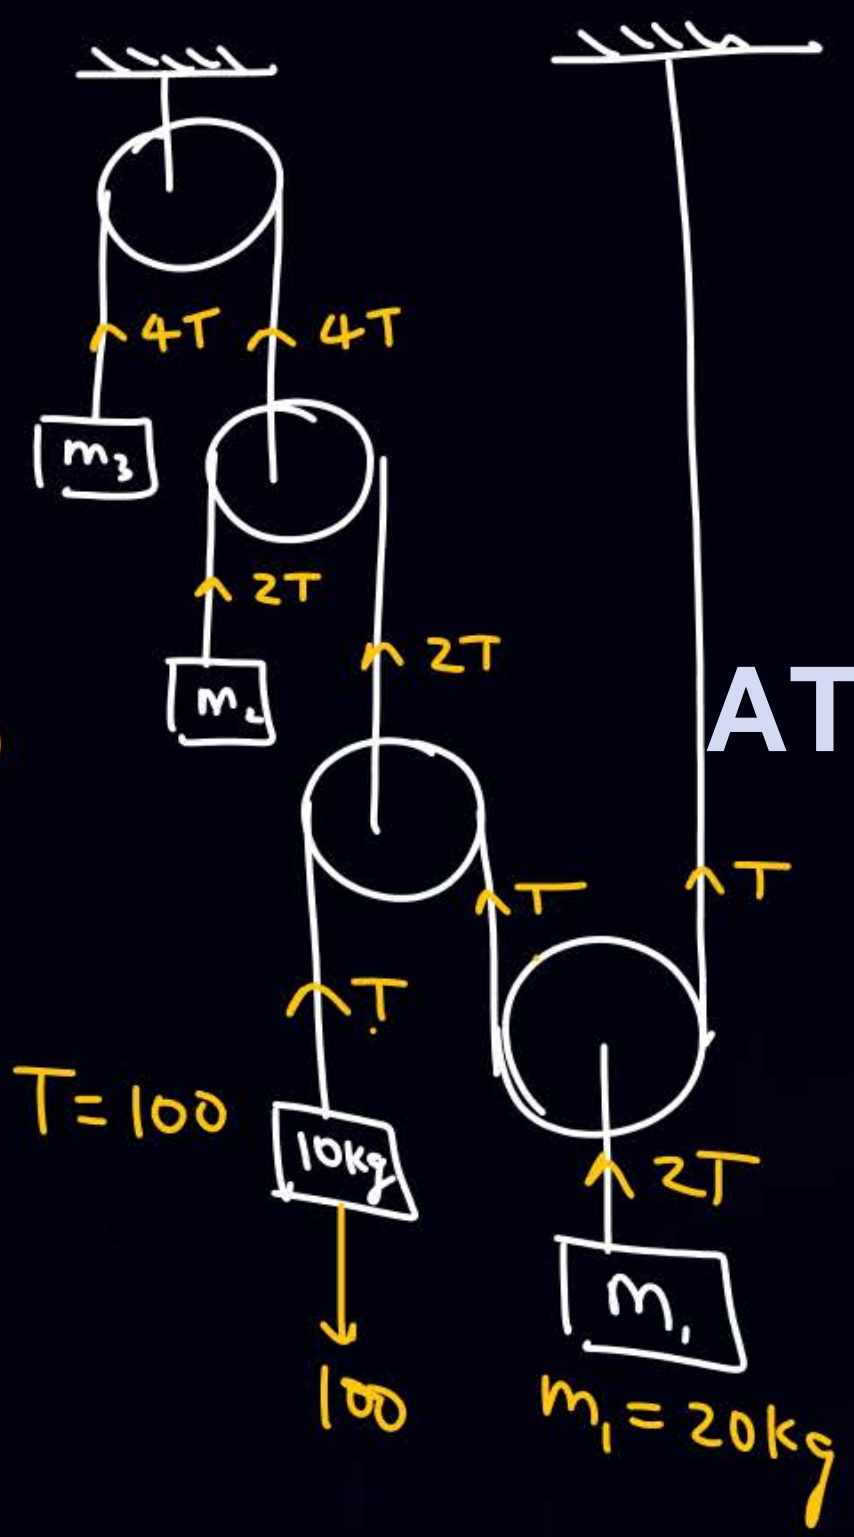


$T = 100$

$m_1 = 20\text{kg}$

ATDB.uno


Q

$4T + 2T + T = mg$
 $7T = mg$
 $700 = mg$
 $m = 70\text{kg}$

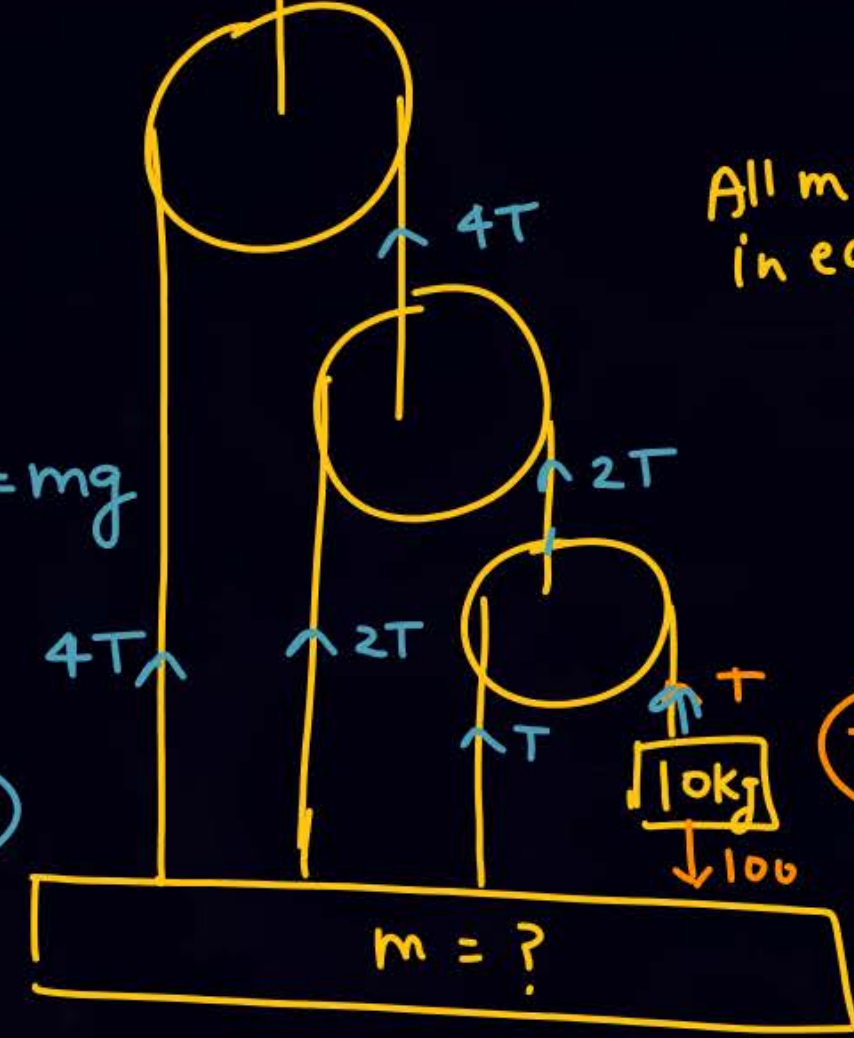

All masses are in equil.

$T = 100$

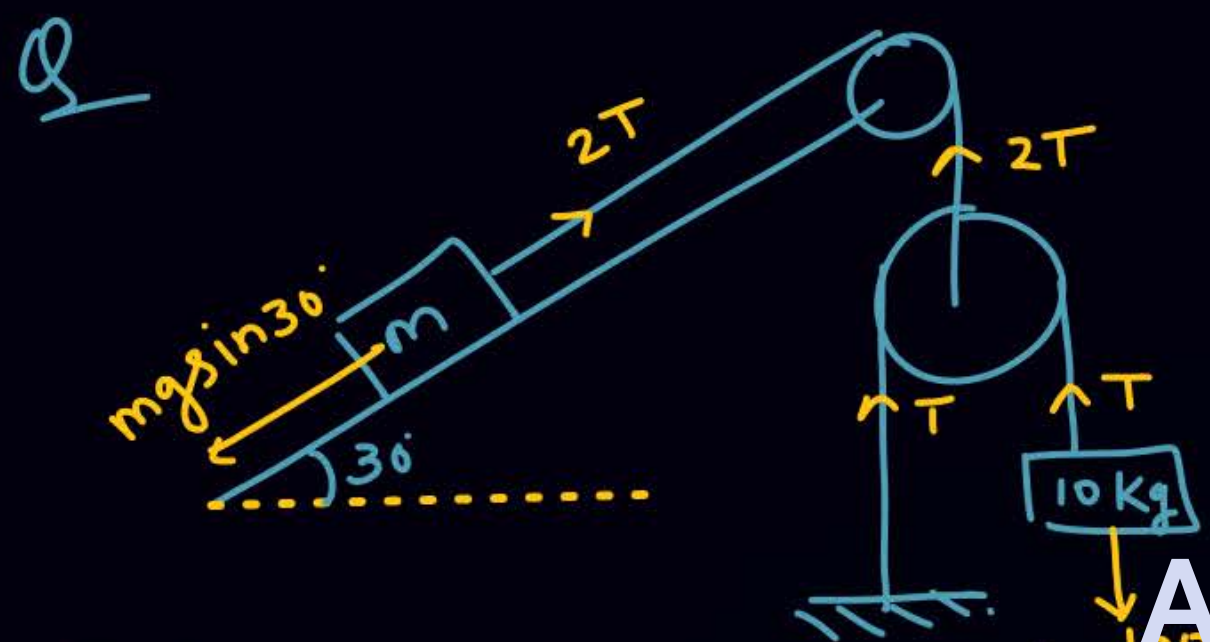


find m if all masses are in equil.

$$2T = mg \sin 30$$

$$200 = m \times 10 \times \frac{1}{2}$$

$$m = 40 \text{ kg}$$

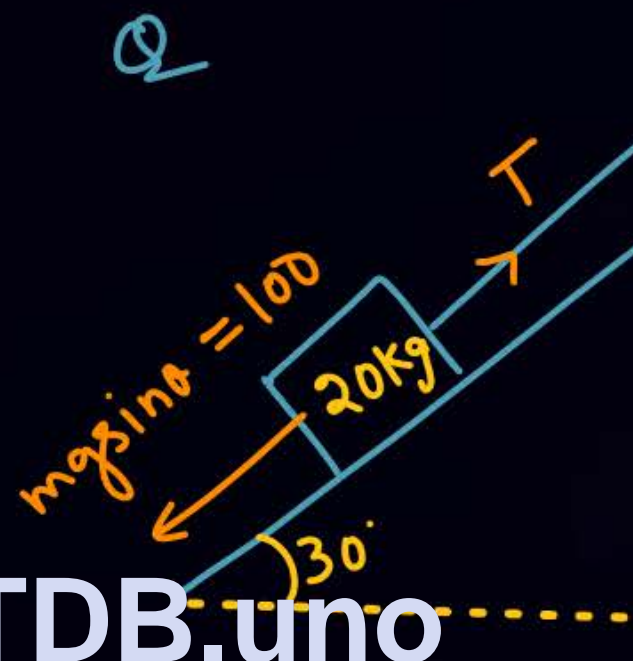


All masses are in equil.


$$2T + T = m'g$$

$$300 = m'g$$

$$m' = 30 \text{ kg}$$

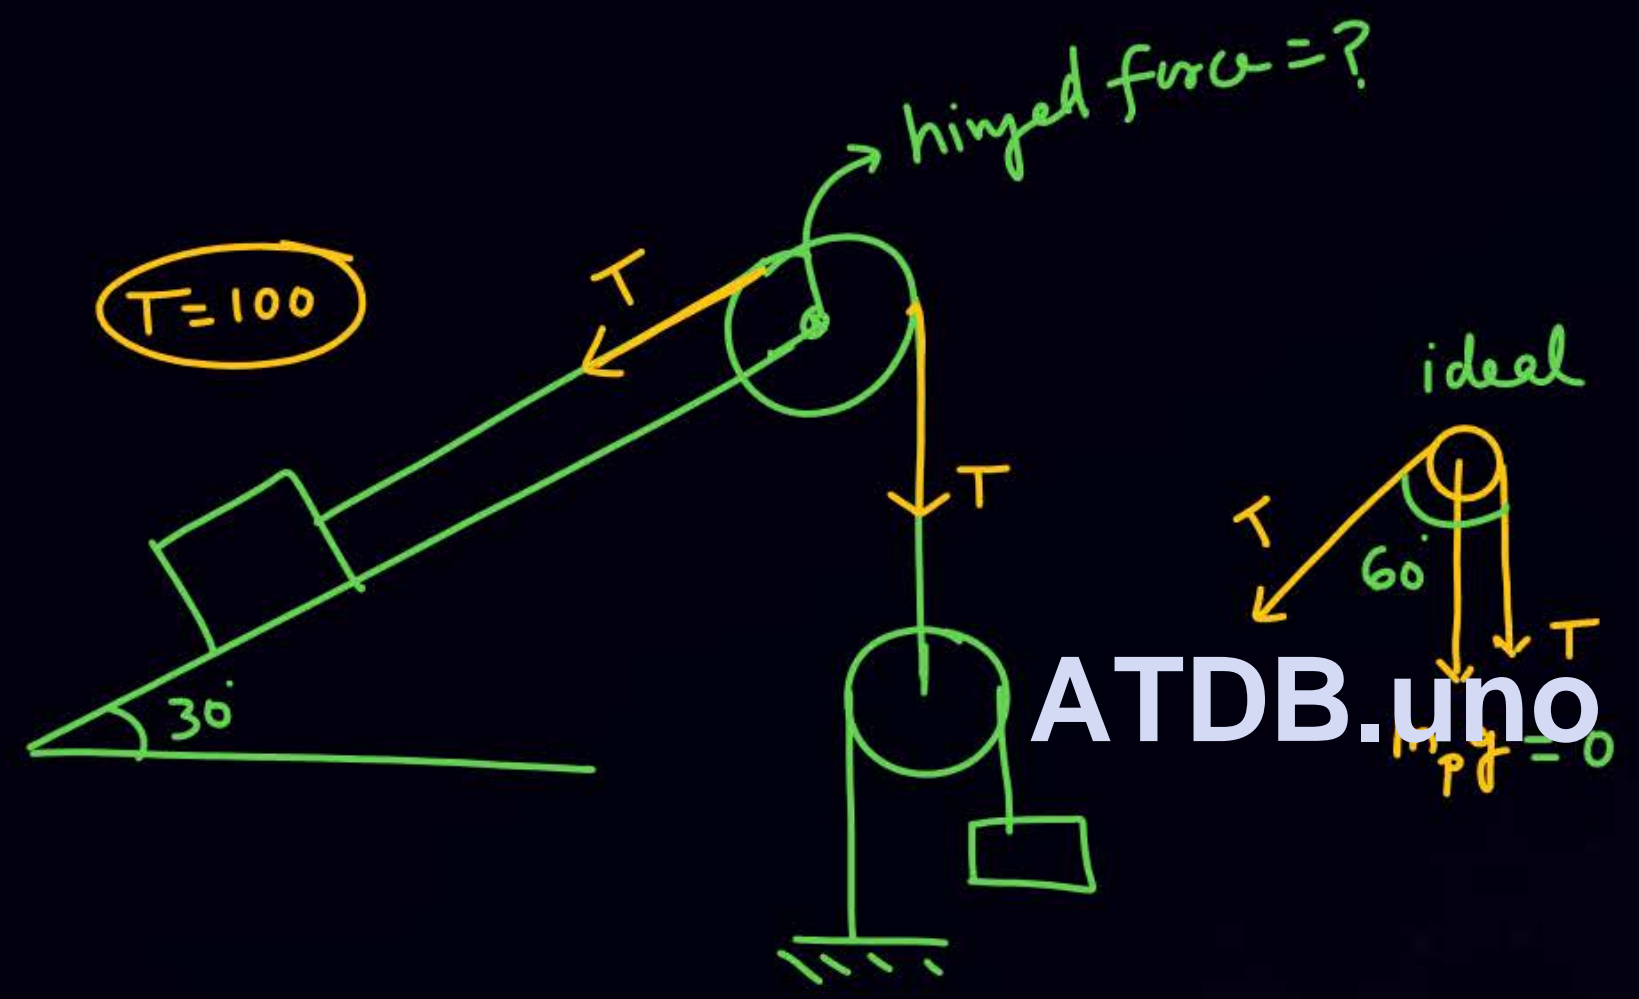


$T = 100$

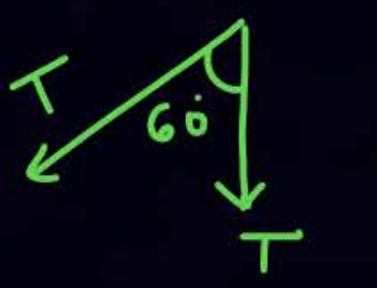

$T\sqrt{3} = 100\sqrt{3} = \text{hinged force}$

ATDB.uno

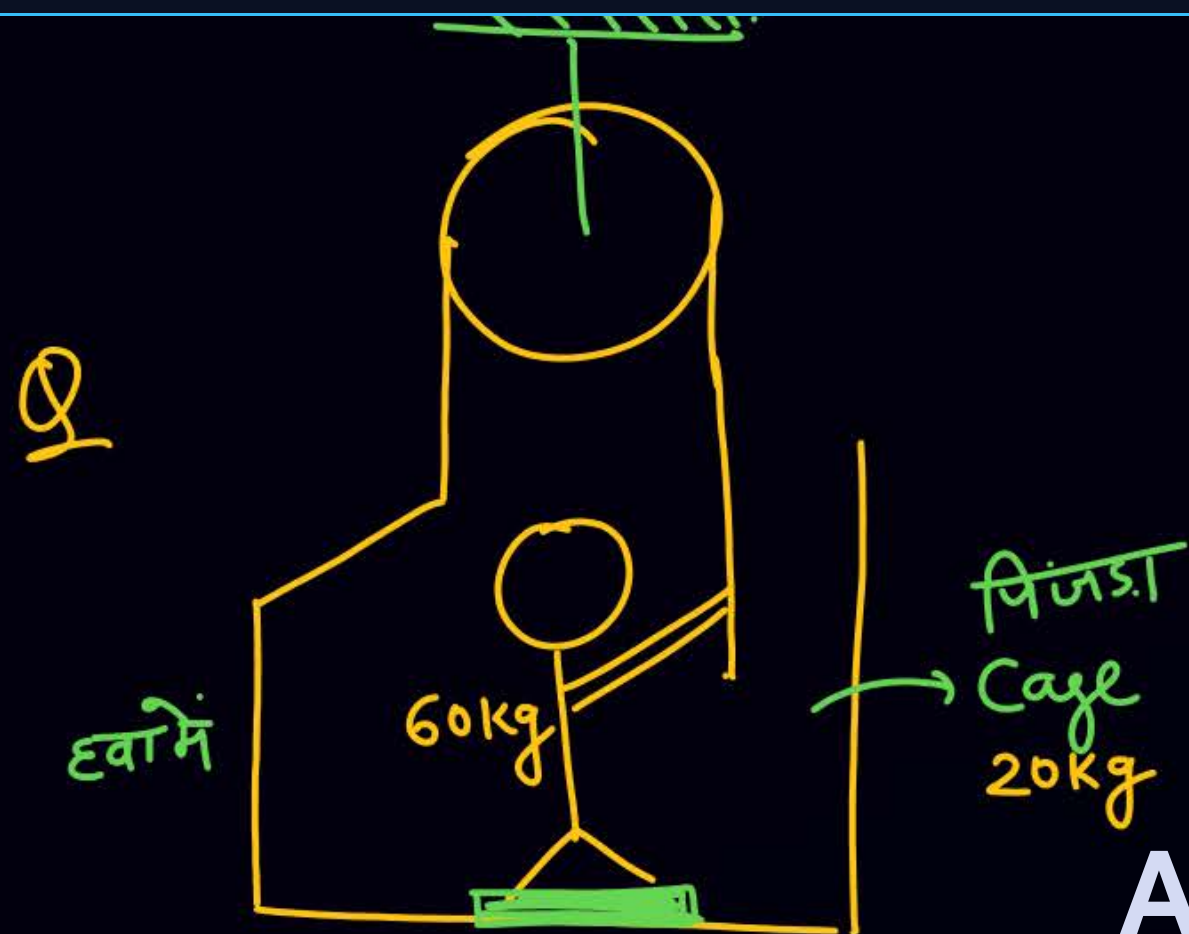


ATDB.uno

HW

④
⑤

- ① force applied by man on रस्सी = T
- ② force applied by रस्सी on man = T
- ③ Normal contact force b/w man & पिंजडा = N
- ④ Reading of weighing machine = N
- ⑤ what force man should apply on string so that weighing machine gives correct reading

Whole system is in equilibrium.

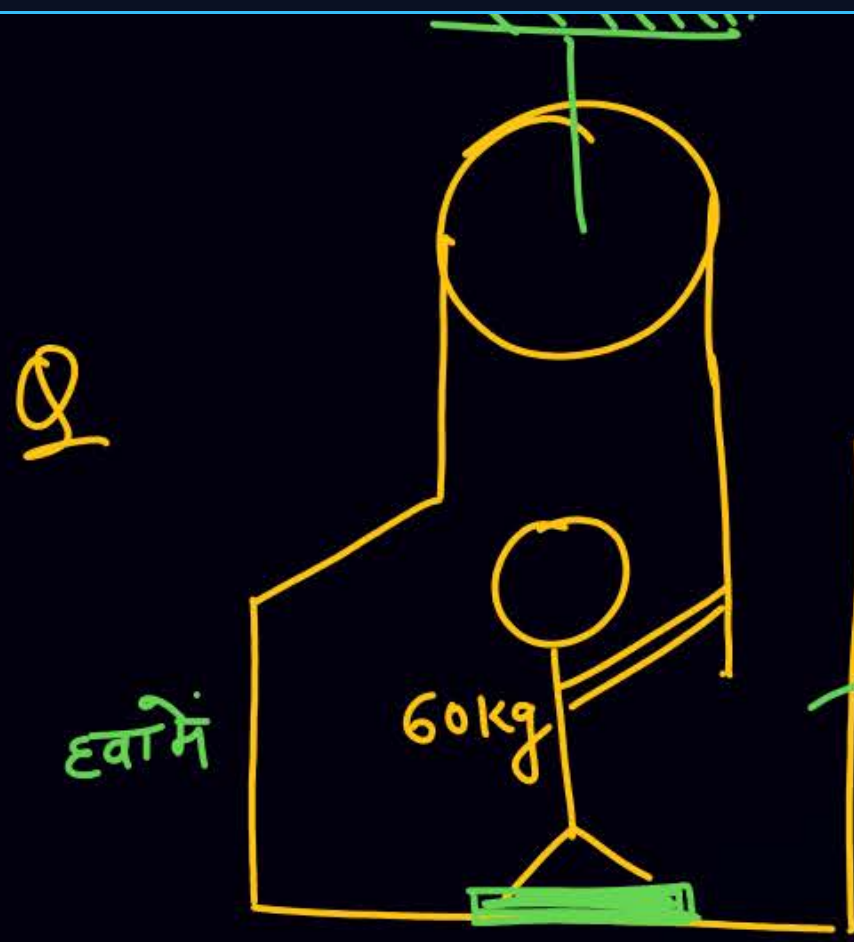

पिजडा
Cage
20kg



ATDB.uno


$$T + N = 600$$

$$T = N + 200$$

$$2T = 800$$


$$T = 400$$

$$N = 200$$

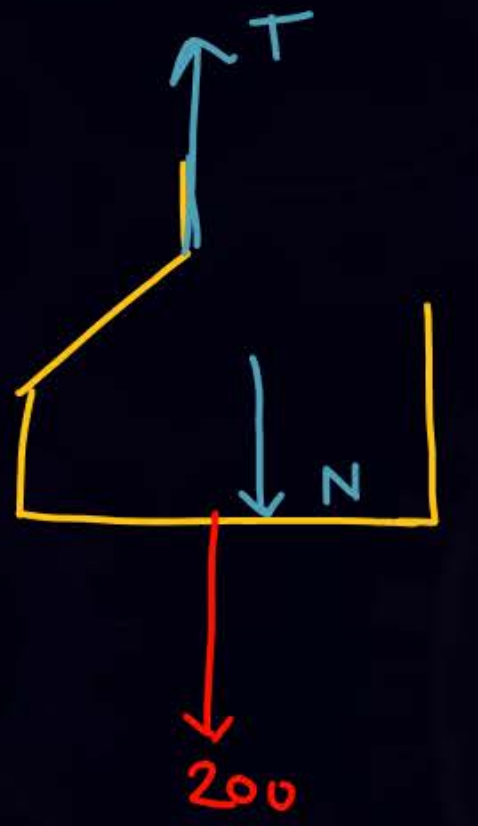

Reading of weighing machine.

Whole system is in equilibrium.

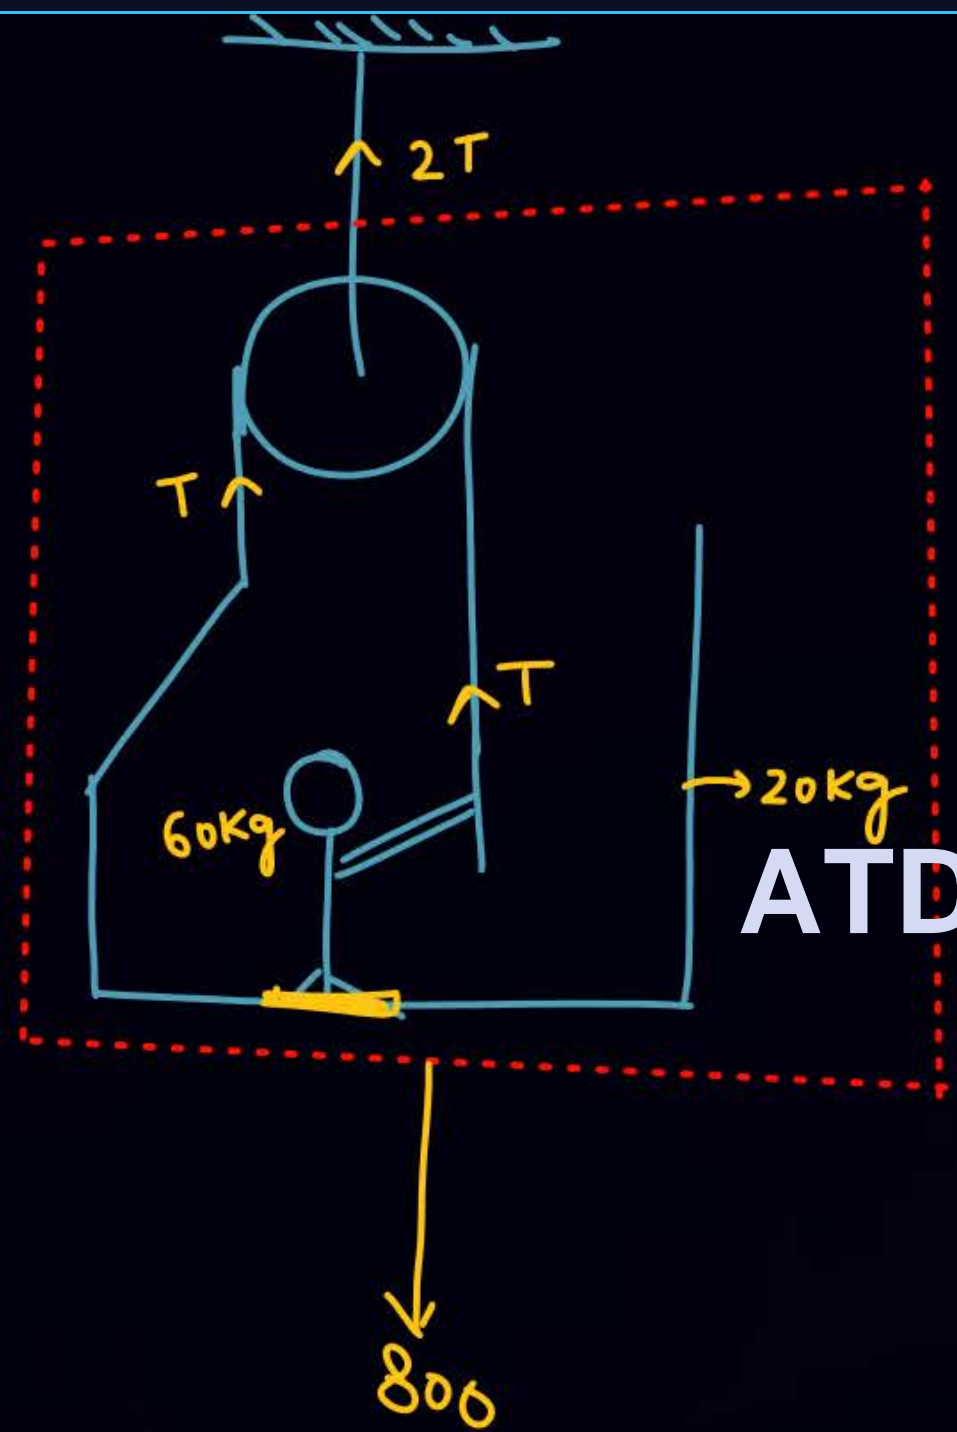

$$2T = 800$$

$$T = 400$$




$$T + N = 600$$

$$400 + N = 600$$

$$N = 200$$

ATDB.uno

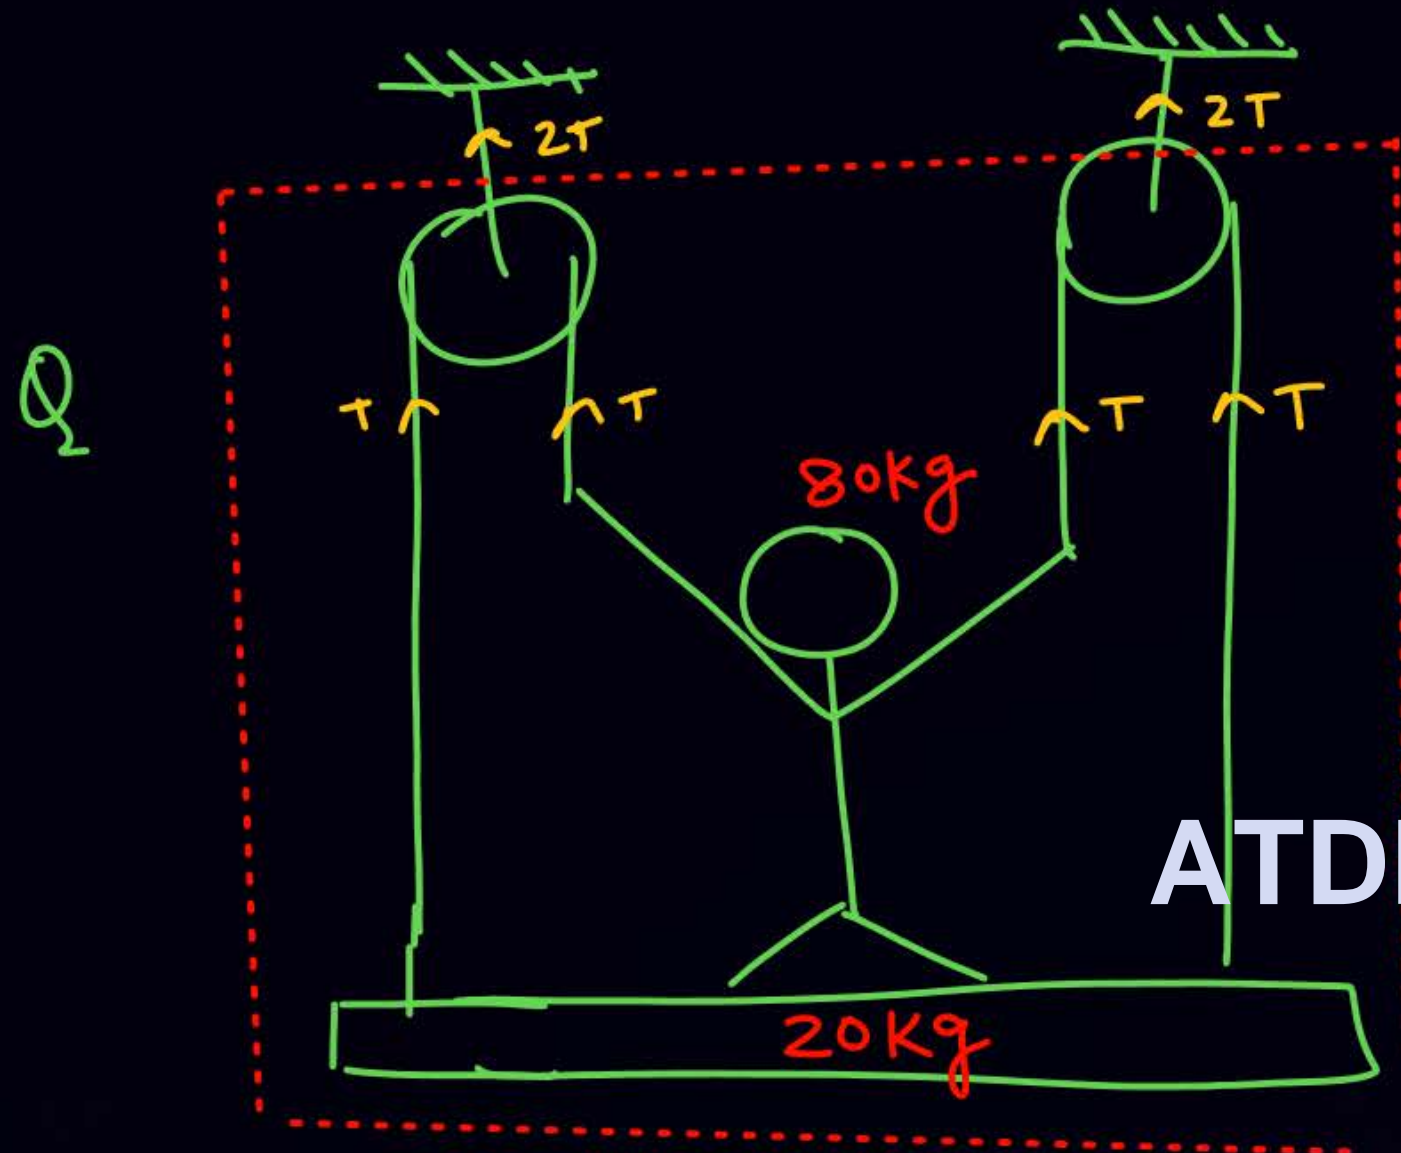


If Dharmendra Sahab applied the same force on both string. & system is in equilibrium. find

- ① force applied by Dharmendra Sahab on string
- ② normal contact force.

ATDB.uno

$$4T = (80 + 20)g$$

$$T = 250$$

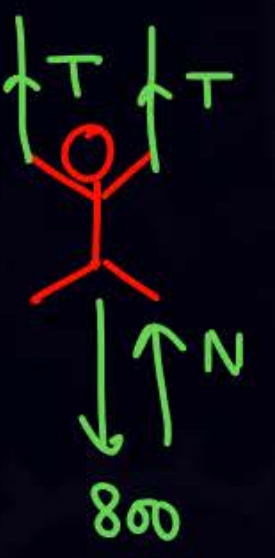


$$2T + N = 800$$

$$500 + N = 800$$

$$N = 300$$




$$\vec{F}_{net} = m\vec{a}$$

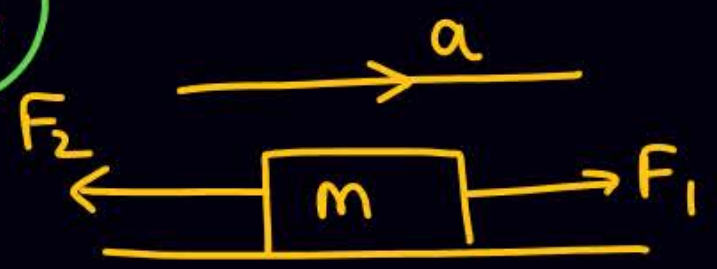

$$F_1 - F_2 = ma$$

लगने वाला
force नहीं है
 F_{net} है

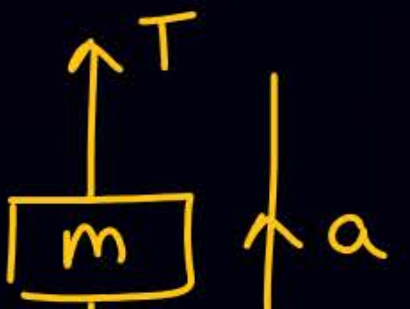

ATDB.uno

$$T - mg = ma$$


Q P



$$100 - 20 = 20 \times a$$



$$a = 8$$

Q

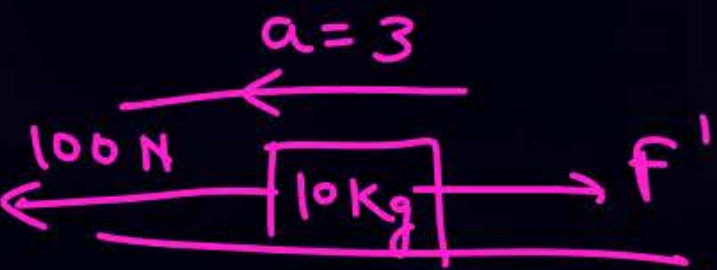


$$100 - F' = 10 \times 3$$

$$F' = 70$$

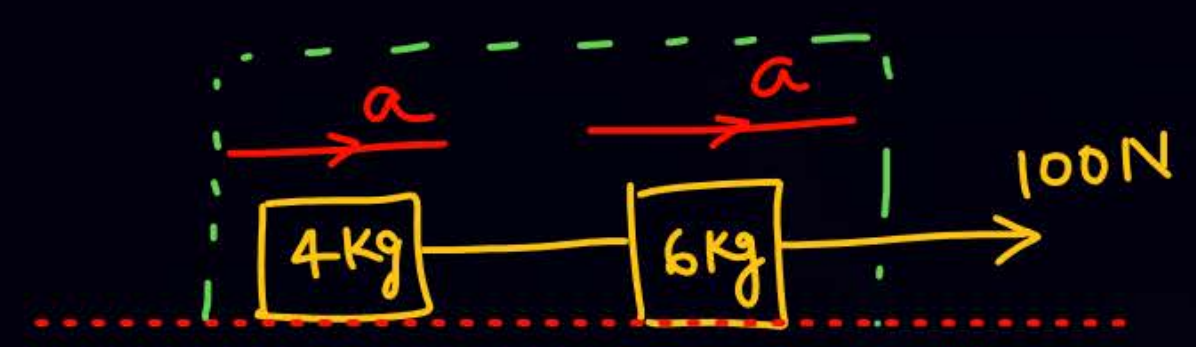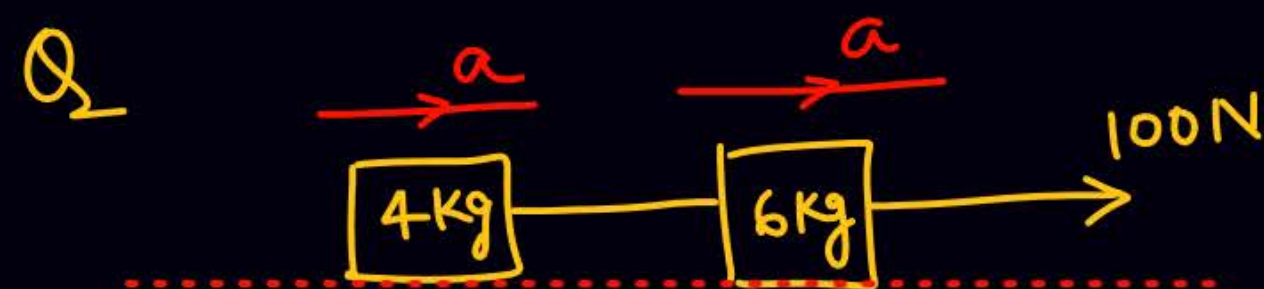

$$a = \frac{(F_{net})_{ext}}{m_{total}} = \frac{100}{4+6} = 10$$

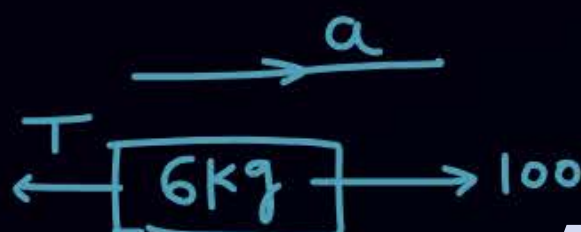


$$T = 4a \quad \text{--- (1)}$$

$$100 - T = 6a \quad \text{--- (2)}$$


Solve & get

$$\begin{aligned} a &= 10 \\ T &= 40 \end{aligned}$$

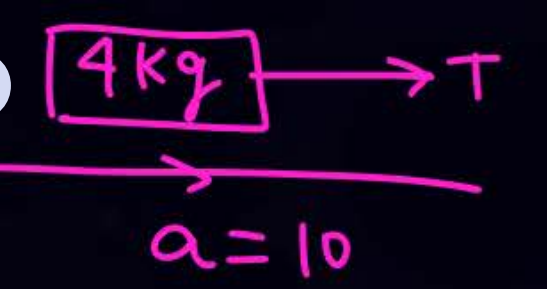


$$T = 4 \times 10 = 40$$

ATDB.uno

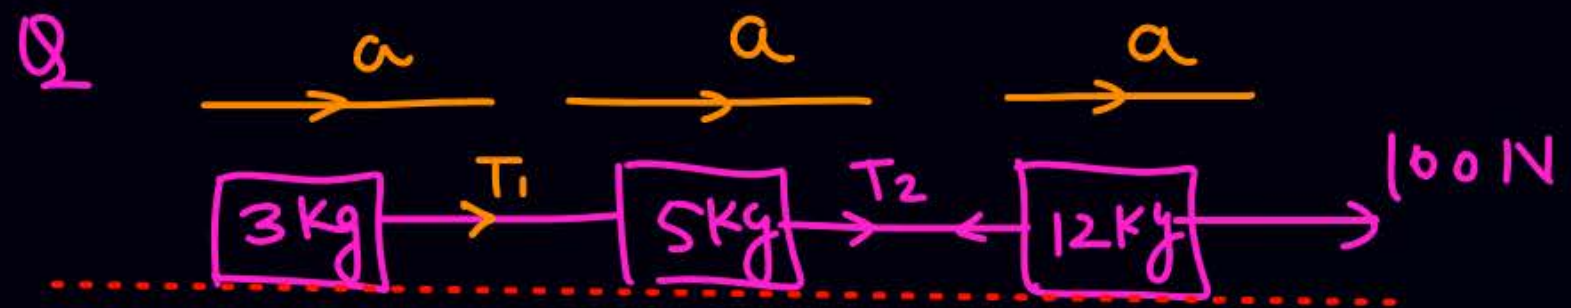

$$a = \frac{100}{3+5+12} = 5$$

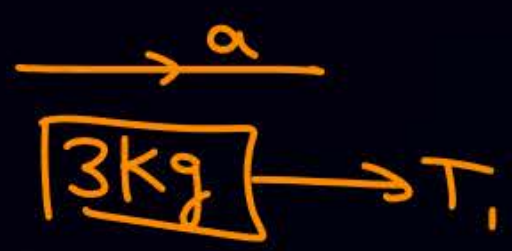

$$T_1 = 3 \times 5 = 15$$




$$100 - T_2 = 12a$$

$$100 - T_2 = 12 \times 5$$

$$T_2 = 40$$


Q

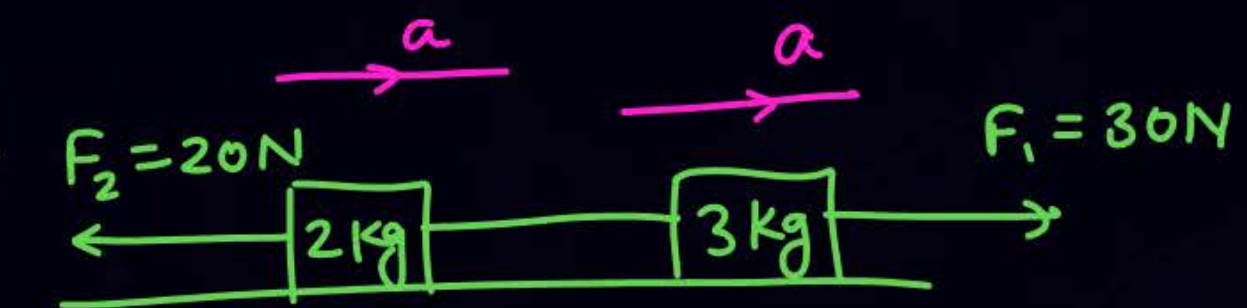


$$T - 20 = 2a$$

$$30 - T = 3a$$


$$a = 2, T = 24$$

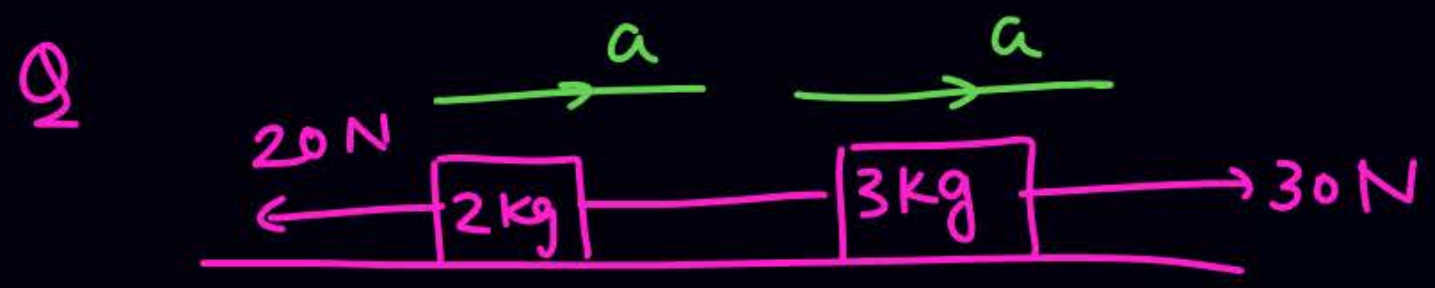


$$a = \frac{F_{net}}{M_{total}} = \frac{30 - 20}{2 + 3} = 2$$

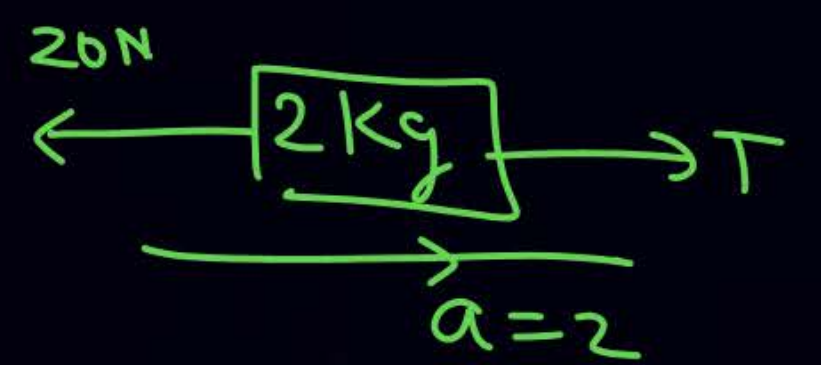


$$T - 20 = 2 \times 2$$

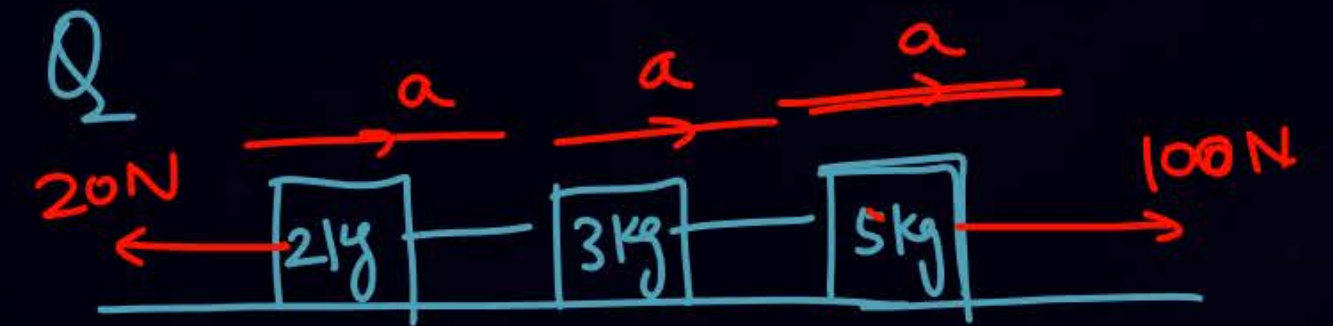

$$a = \frac{100 - 20}{2 + 3 + 5} = 8$$

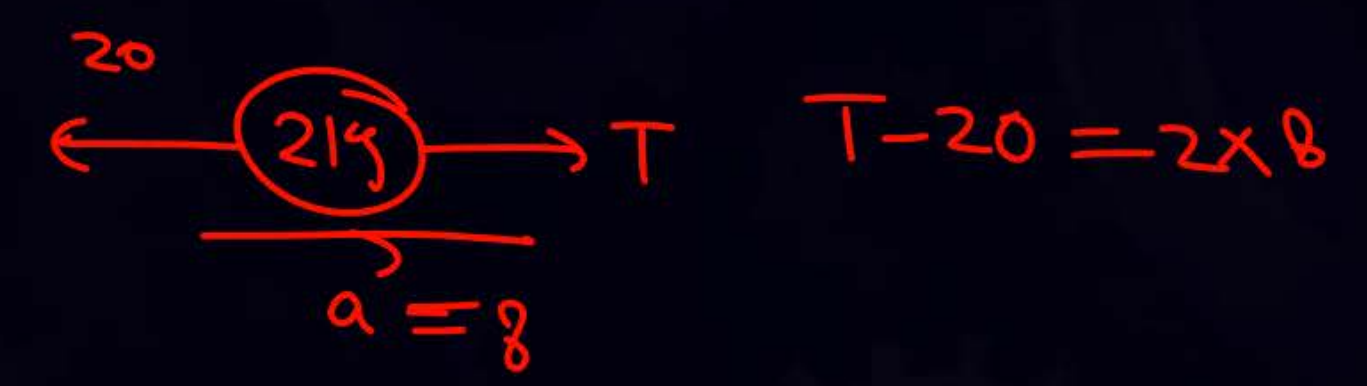


$$T - 20 = 2 \times 8$$

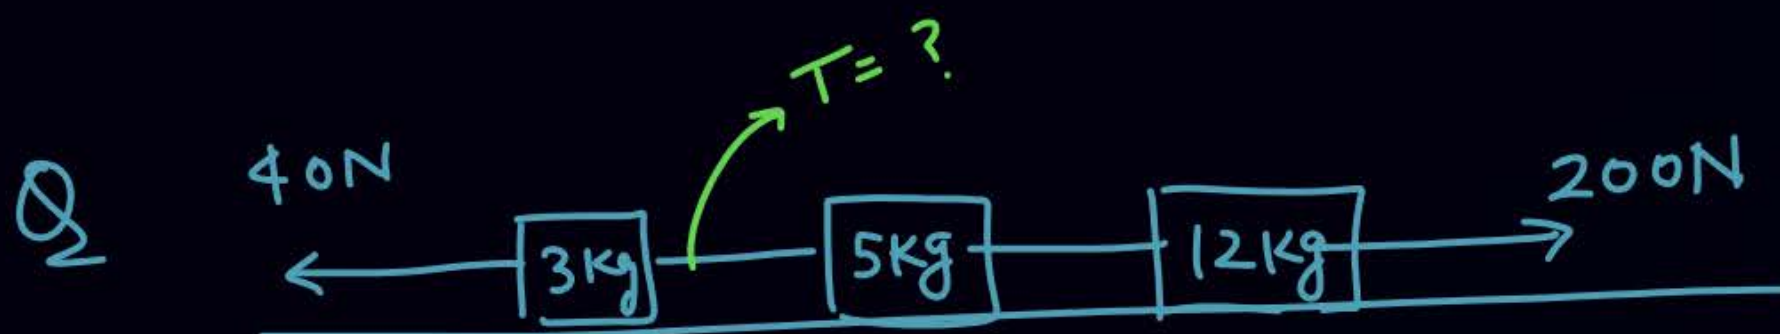

$$a = \frac{200 - 40}{20} = 8$$

ATDB.uno

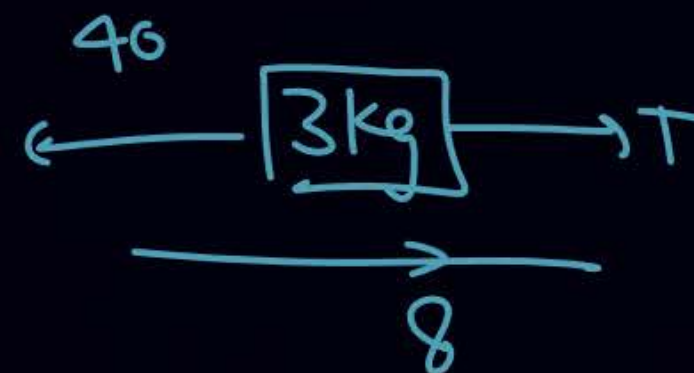



$$T - 40 = 8 \times 3$$

$$T = 64$$



$$T - 400 = 40 \times 2$$



$$T = 480$$

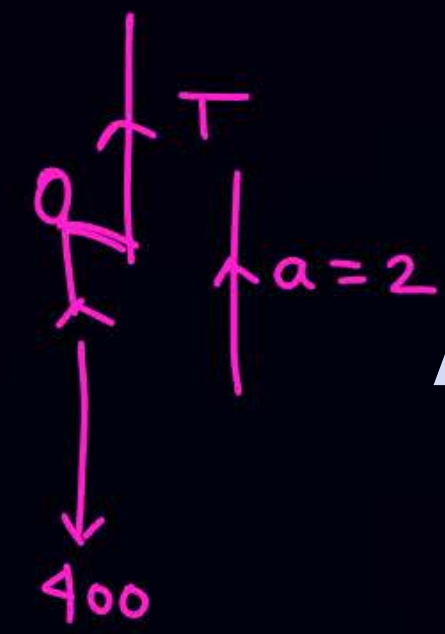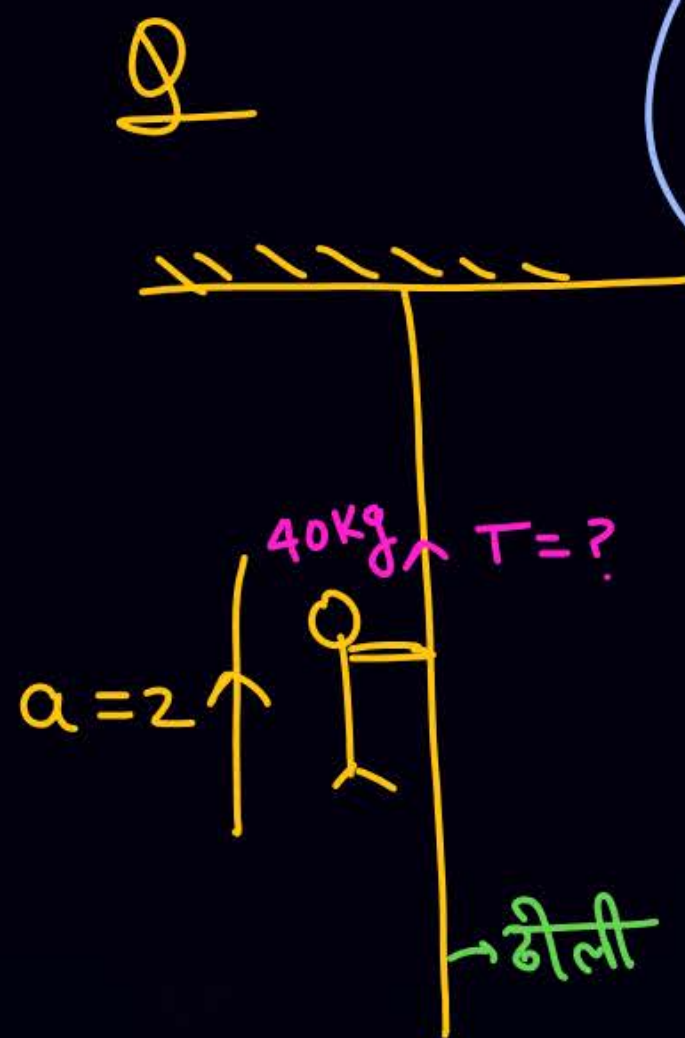

$$T - 400 = 40 \times 2$$

$$\boxed{T = 480}$$

ATDB.uno

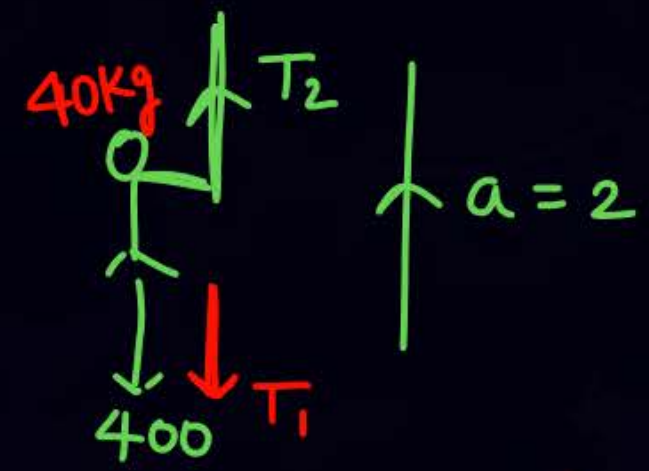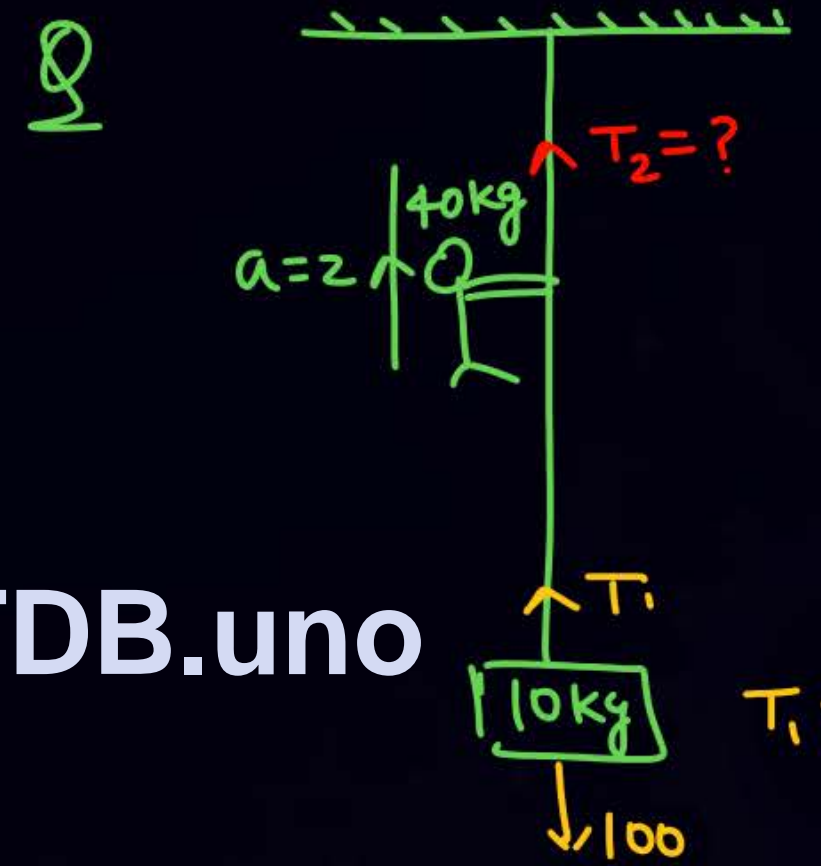



$$T_1 = 100$$

$$T_2 - 400 - T_1 = 40 \times 2$$

$$\boxed{T_2 = 580}$$

M2

$$T_2 - 500 = 80 + 0$$

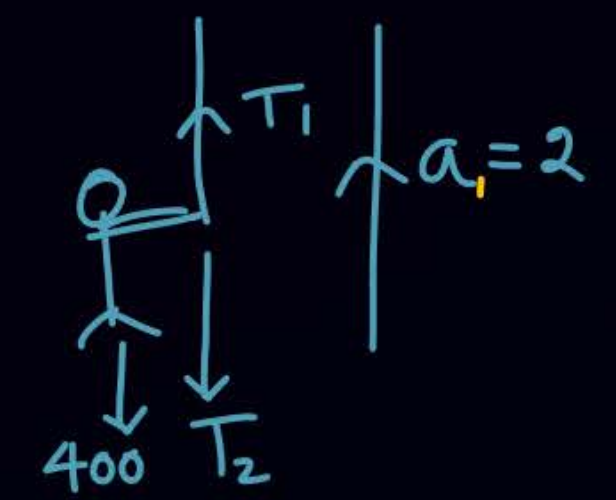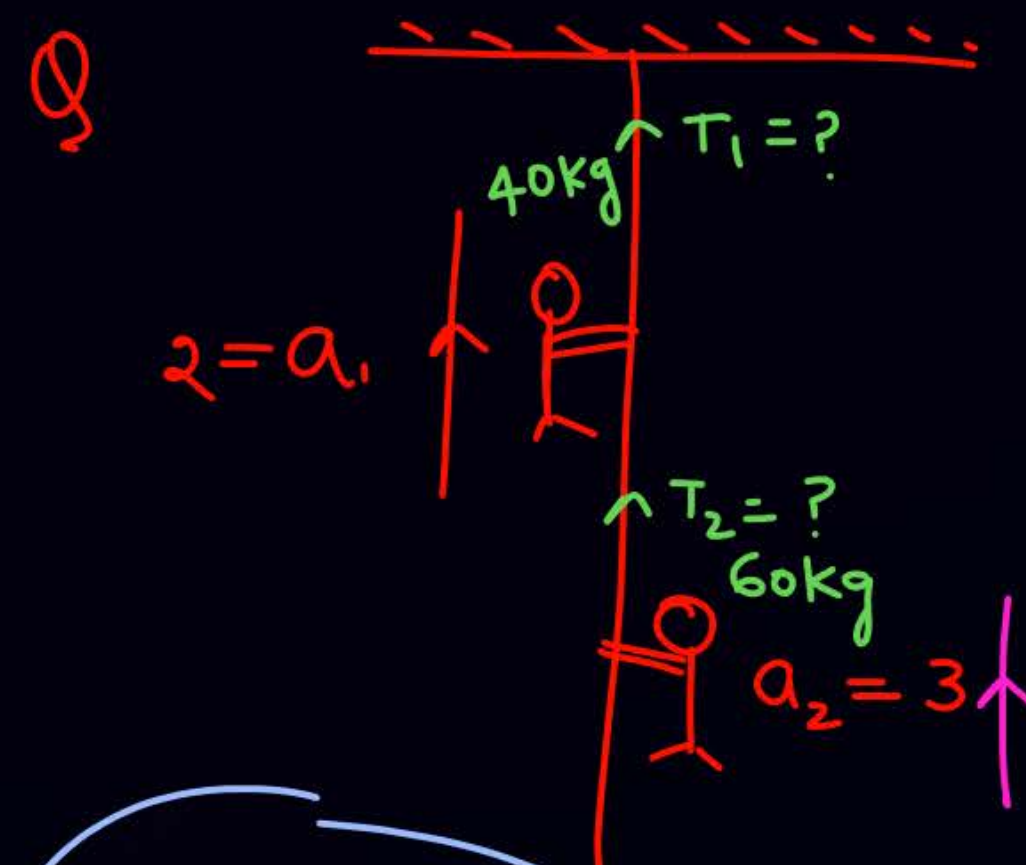

$$T_1 - 400 - T_2 = 40 \times 2$$

$$T_1 = 400 + 780 + 80 = 1260$$

ATDB.uno




$$T_2 - 600 = 60 \times 3$$

$$T_2 = 780$$

$$T_1 - 1000 = 80 + 180$$

$$T_1 = 1260$$

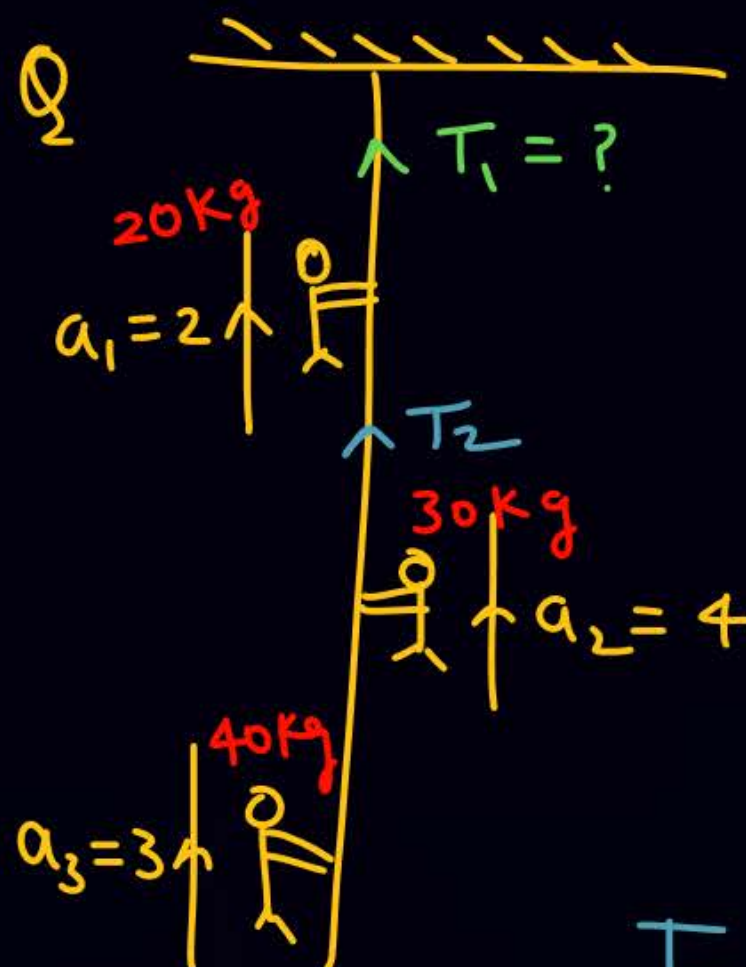


$$(\vec{F}_{\text{net}})_{\text{ext}} = m_1 \vec{a}_1 + m_2 \vec{a}_2 + m_3 \vec{a}_3$$

$$T_1 - 900 = 20 \times 2 + 30 \times 4 + 40 \times 3$$

$$(mg)_{\text{total}}$$

ATDB.uno

$$T_2 - 700 = 30 \times 4 + 40 \times 3$$

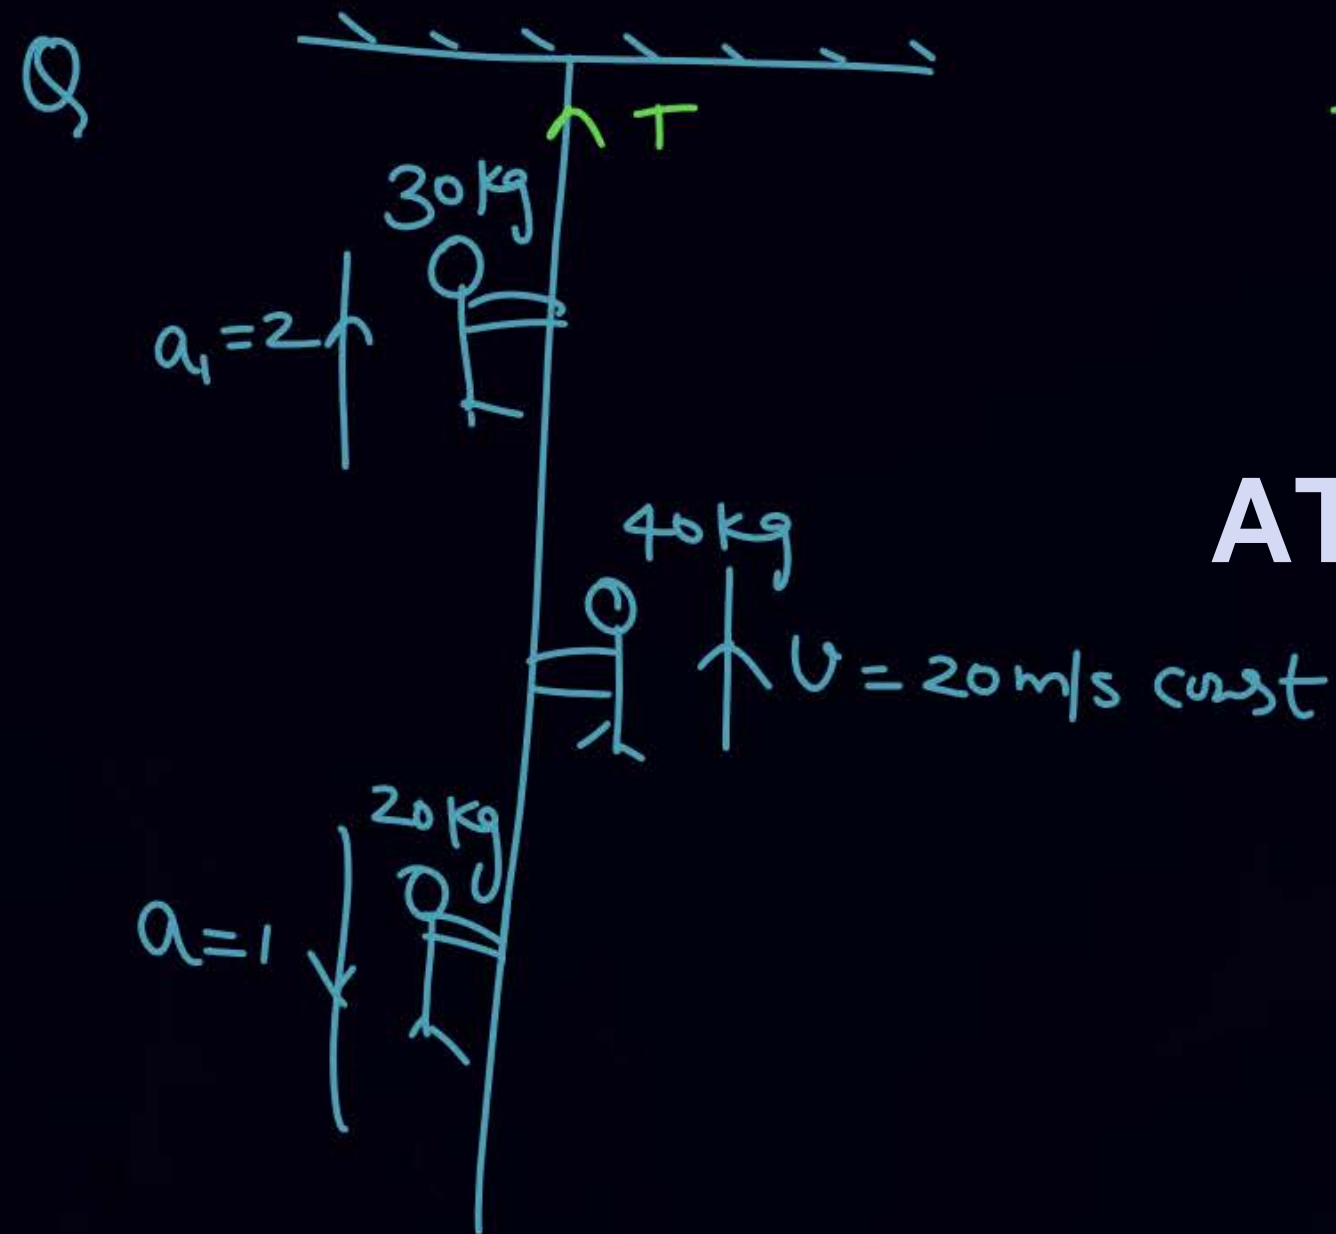

$$T - 900 = 60 + 0 + 20(-1)$$

$$T = 940$$

ATDB.uno




$$\left(\vec{F}_{\text{net}} \right)_{\text{ext}} = m_1 \vec{a}_1 + m_2 \vec{a}_2 + m_3 \vec{a}_3 + \dots$$

if $\vec{a}_1 = \vec{a}_2 = \vec{a}_3 = \dots = \vec{a}$

$$\vec{a} = \frac{\vec{F}_{\text{net}}}{(m_{\text{total}})_{\text{sys}}}$$

$$\left(F_{\text{net}} \right)_{\text{ext}} = (m_1 + m_2 + \dots) \vec{a}$$

$$\left(F_{\text{net}} \right)_{\text{ext}} = (m_{\text{total}})_{\text{sys}} \vec{a} = m_{\text{total}} \vec{a}_{\text{com}}$$

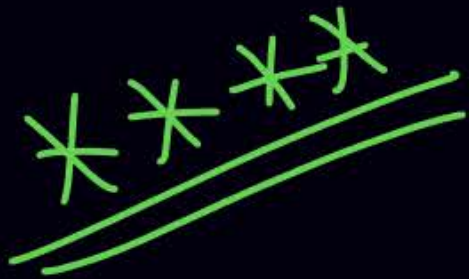

$$\vec{F}_{\text{net ext}} = \frac{m_1 \vec{a}_1 + m_2 \vec{a}_2 + m_3 \vec{a}_3 + \dots}{(m_1 + m_2 + m_3 + \dots)} \cdot (m_1 + m_2 + \dots)$$

ATDB.uno

$$\vec{F}_{\text{net ext}} = M_{\text{total}} \vec{a}_{\text{com}}$$



H.W

- Revise class Notes

- DPP-02

ATDB.uno



THANK YOU

ATDB.uno

